

VIOLINTM

Crystalline PV Module ASM6610M(BL) Series

- ▶ With innovative 4-busbar mono cell
- ▶ Reduced series resistance
- ▶ Increased cell efficiency
- ▶ More power output

270 275 280 285

EN

ELECTRICAL SPECIFICATIONS ¹

STC ² rated output (P _{max})	270 Wp	275 Wp	280 Wp	285 Wp
Standard sorted output	-0/+3%			
Warranted power output STC (P _{nominal})	270 Wp	275 Wp	280 Wp	285 Wp
Rated voltage (V _{mpp}) at STC	31.35 V	31.45 V	31.55 V	31.65 V
Rated current (I _{mpp}) at STC	8.75 A	8.86 A	8.98 A	9.09 A
Open circuit voltage (V _{oc}) at STC	37.95 V	38.05 V	38.15 V	38.25 V
Short circuit current (I _{sc}) at STC	9.18 A	9.28 A	9.38 A	9.48 A
Module efficiency	16.51%	16.81%	17.12%	17.42%
Rated output (P _{mpp}) at NOCT ³	201.1 Wp	204.4 Wp	207.7 Wp	211.0 Wp
Rated voltage (V _{mpp}) at NOCT	28.64 V	28.73 V	28.82 V	28.91 V
Rated current (I _{mpp}) at NOCT	7.02 A	7.11 A	7.21 A	7.30 A
Open circuit voltage (V _{oc}) at NOCT	34.83 V	34.93 V	35.02 V	35.11 V
Short circuit current (I _{sc}) at NOCT	7.43 A	7.51 A	7.59 A	7.67 A

Temperature coefficient (P _{mpp})	- 0.442 % / K	Maximum system voltage	1000 V _{dc}
Temperature coefficient (I _{sc})	+0.042 % / K	Number of diodes	3
Temperature coefficient (V _{oc})	- 0.329 % / K	Reverse current loadability (I _R)	20 A
Normal operating cell temperature (NOCT)	48 °C ± 2 °C	Maximum series fuse rating	15 A


¹ Measuring uncertainty P_{mpp}: +/- 3 %; Tolerance for V_{oc}, I_{sc}, V_{mpp} and I_{mpp}: +/- 10 %

² Standard test conditions that are defined as follows:

1.000 W/m² irradiation at a spectral density of AM 1.5 and a cell temperature of 25° C,

³ Nominal operating temperature of the cell at 800 W/m² irradiation, 20°C ambient temperature, wind speed of 1 m/s

⁴ Manufactured in an ISO9001/14001/50001 certified facility



RELATED PARAMETERS


Cell type	Monocrystalline cell, 4-busbar technology
Number of cells / cell arrangement	60 / 6 x 10
Cells dimension	157 x 157 mm ²

MECHANICAL SPECIFICATIONS

Outer dimensions (L x W x H) ⁵	1654 x 989 x 40 mm
Frame technology	Aluminum, black anodized
Module composition	Glass / EVA / Backsheet (black)
Weight (module only)	18.2 kg
Front glass thickness	3.2 mm
Junction box IP rating	IP 67
Cable length	1000 mm
Cable diameter	4 mm ²
Maximum load capacity ⁶	6000 Pa
Fire class (IEC 61730)	C
Connector type	MC4 pluggable

QUALIFICATION AND LINEAR WARRANTIES

Product standard	IEC 61215 Ed. 2, IEC 61730
Extended product warranty ⁷	12 years
Performance warranty ⁷	Linear performance warranty
Year 1	>97.5% of warranted output power
Year 25	>80.7% of warranted output power

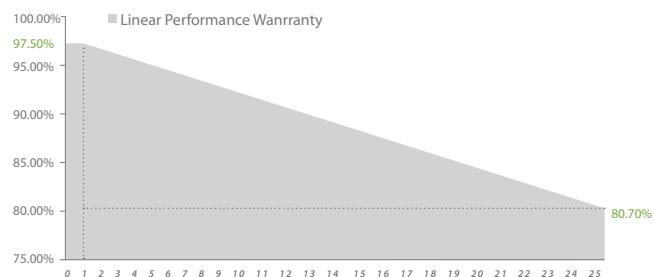

MODULE DIMENSION DETAILS

Front view	Side view	Rear view	Frame cross section

© No mounting holes on the frame.

⁵ Dimensional tolerance: +/-2 mm

⁶ In accordance with IEC 61215 Ed. 2

⁷ According to the current warranty conditions of Astronergy Solarmodule GmbH

© Astronergy Solarmodule GmbH

Specifications and designs included in this datasheet are subject to change without notice.
All rights reserved.