



Smart  
connections.

Data sheet

PIKO 3.0

3.0

## Technical data PIKO 3.0



- Single-phase feed-in
- Transformerless converting
- Integrated electronic DC switch
- Broad input voltage range
- Standard integrated communication package with data logger, web server, solar portal and the following interfaces: 2x Ethernet, RS485, S0, 4x analogue inputs (e.g. for ripple control receivers or PIKO Sensor)
- Integrated switch contact for self-consumption optimisation
- Smart Home and EEBus compatible

### Input side (DC)

Max. PV power	kWp	4.3
Rated input voltage ( $V_{DC,r}$ )	V	400
Max. input voltage ( $V_{DCmax}$ )	V	900
Min. input voltage ( $V_{DCmin}$ )	V	160
Start input voltage ( $V_{DCstart}$ )	V	180
Max. MPP voltage ( $V_{MPPmax}$ )	V	730
Min. MPP voltage with DC rated output in single-tracker operation ( $V_{MPPmin}$ )	V	270
Min. MPP voltage with DC rated output in dual-tracker or parallel operation ( $V_{MPPmin}$ )		–
Max. input current ( $I_{DCmax}$ )	A	12.5
Max. input current with parallel connection	A	–
Number of DC inputs		1
Number of independent MPP trackers		1

### Output side (AC)

Rated output, $\cos \varphi = 1$ ( $P_{AC,r}$ )	kW	3
Max. output apparent power $\cos \varphi, adj$	kVA	3
Max. output voltage ( $V_{ACmax}$ )	V	264.5
Min. output voltage ( $V_{ACmin}$ )	V	184
Rated output current	A	13
Max. output current ( $I_{ACmax}$ )	A	13.7
Short-circuit current (peak / RMS)	A	26.4 / 16.9
Grid connection		1N~, AC, 230V
Rated frequency ( $f_r$ )	Hz	50
Max. grid frequency ( $f_{max}$ )	Hz	51.5
Min. grid frequency ( $f_{min}$ )	Hz	47.5
Setting range of the power factor $\cos \varphi_{AC,r}$		0.9...1...0.9
Power factor for rated power ( $\cos \varphi_{AC,r}$ )		1
Max. total harmonic distortion	%	$\leq 3$

### Device properties

Standby consumption	W	1.7
---------------------	---	-----

### Degree of efficiency

Max. efficiency	%	96.2
European efficiency rate	%	95.5
MPP adjustment efficiency	%	99.9

### Warranty

Warranty (years)		5
Warranty extension optional (years)		10/20


### System data

Topology: Without galvanic separation - transformerless		✓
Internal protection according to IEC 60529 housing / fan		IP 65 / IP 55
Protection class according to IEC 62103		I
Surge category according to IEC 60664-1 Input side (PV generator)		II
Surge category according to IEC 60664-1 Output side (grid connection)		III
Pollution Degree		4
Environmental category (outdoor installation)		✓
Environmental category (interior installation)		✓
UV resistance		✓
Minimum cable cross-section of AC connecting line	mm <sup>2</sup>	2.5
Minimum cable cross-section of DC connecting line	mm <sup>2</sup>	4
Max. fusing on output side		B16, C16
Operator protection (EN 62109-2)		RCMU/RCCB type B
Electronic disconnection device integrated		✓
Height	mm	385 (15.2 in)
Width	mm	500 (19.7 in)
Depth	mm	222 (8.7 in)
Weight	kg	22 (48.5 lb)
Cooling principle - convection		✓
Cooling principle - regulated fans		–
Max. air throughput	m <sup>3</sup> /h	–
Max. noise emission	dBA	< 33
Ambient temperature	°C	-20...60 (-4...140 °F)
Max. installation altitude above sea level	m	2000 (6562 ft)
Relative humidity	%	4...100
Connection technology at input side - MC 4		✓
Connection technology at output side - spring-loaded terminal strip		✓

### Interfaces

Ethernet RJ45		2
RS485		1
S0		1
Analogue inputs		4
PIKO BA Sensor Interface		–

### Efficiency rate characteristic curves PIKO 3.0

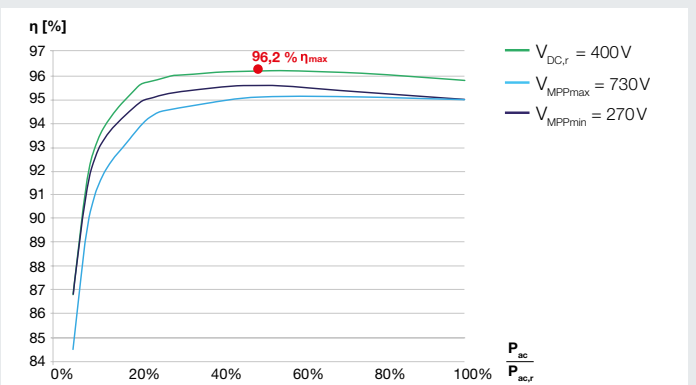

Smart  
connections.

### Contact

KOSTAL Solar Electric GmbH  
Hanferstr. 6  
79108 Freiburg  
Germany  
Tel. +49 761 477 44 - 100  
Fax +49 761 477 44 - 111  
www.kostal-solar-electric.com